

# Interoperability Layer IL ver. 4.0.0

Compatible with KenyaEMR 17.5.x – 18.0.1 (Last reviewed on 4<sup>th</sup> August 2021.)

## INTEROPERABILITY LAYER CONFIGURATIONS FOR KENYAEMR.

The following are instruction on how to install and configure IL on a KenyaEMR implementation using Ubuntu as the Operating System. The provided procedures also include configurations for IL end points on IL application, which can be configured after successful installation.

### SECTION 1: PREPARATORY EVENTS Procedure:

#### 1. Delete Liquibase for Charts and IL entries.

Log into MySQL and select openmrs as the default database then run the following


```
scripts: delete from liquibasechangelog where id Like 'kenyaemrCharts%';  
delete from liquibasechangelog where id Like 'kenyaemrIL%';  
exit (to exitmysql)
```

### SECTION 2: IL INSTALLATION

#### 1. Install IL


Open the terminal

Change directory to IL installer folder and run the following scripts.

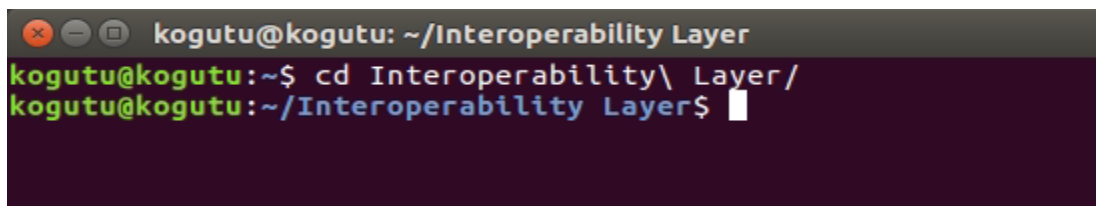

```
kogutu@kogutu: ~/Interoperability Layer  
kogutu@kogutu:~$ cd Interoperability\ Layer/  
kogutu@kogutu:~/Interoperability Layer$
```


- `sudo chmod a+x install.sh`

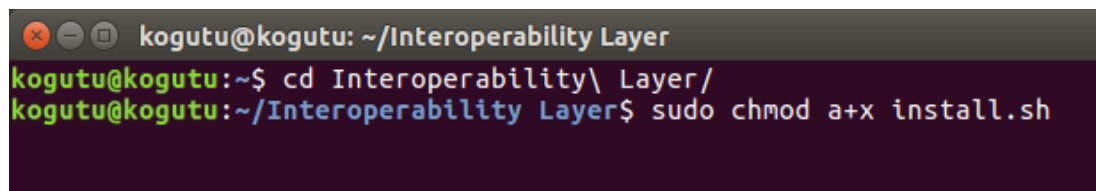

```
kogutu@kogutu: ~/Interoperability Layer  
kogutu@kogutu:~$ cd Interoperability\ Layer/  
kogutu@kogutu:~/Interoperability Layer$ sudo chmod a+x install.sh
```



```
kogutu@kogutu: /opt/Interop-Layer/dist/src/config
kogutu@kogutu:~$ cd /opt/Interop-Layer/dist/src/config/
kogutu@kogutu: /opt/Interop-Layer/dist/src/config$ sudo gedit config.json
```

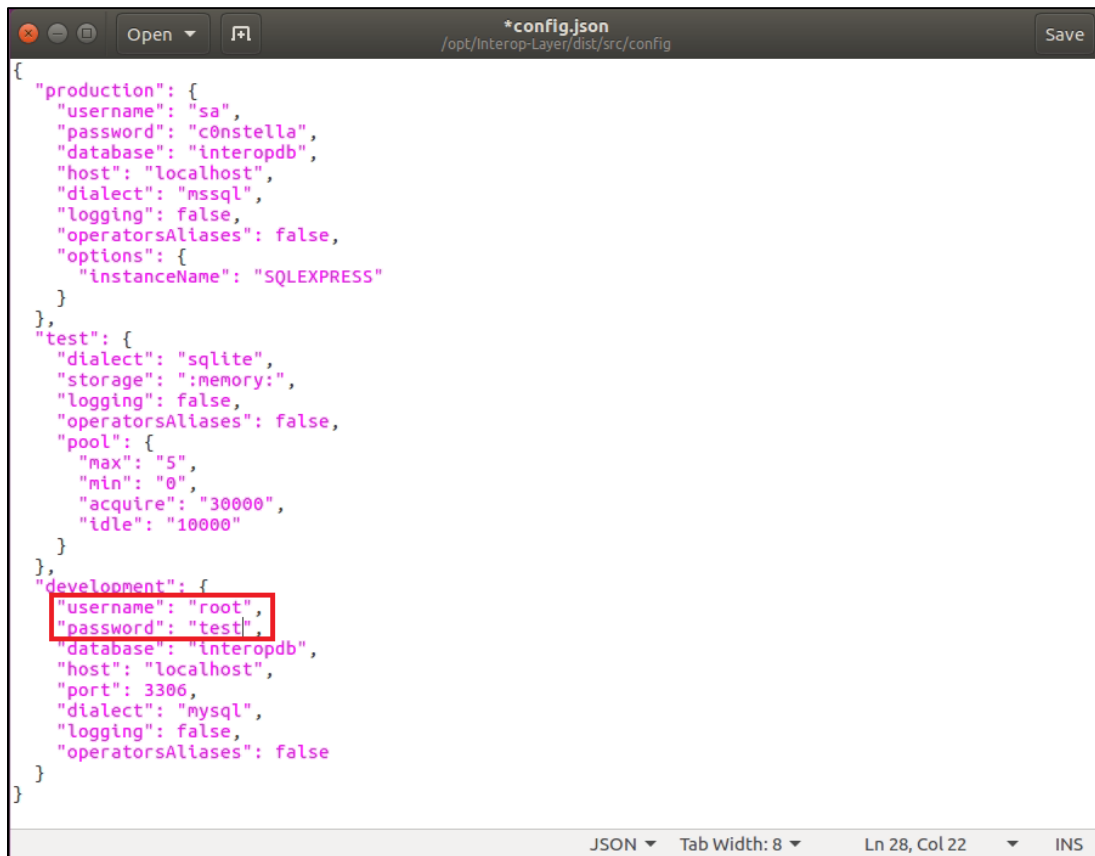

```
{
  "production": {
    "username": "sa",
    "password": "c0nstella",
    "database": "interopdb",
    "host": "localhost",
    "dialect": "mssql",
    "logging": false,
    "operatorsAliases": false,
    "options": {
      "instanceName": "SQLEXPRESS"
    }
  },
  "test": {
    "dialect": "sqlite",
    "storage": ":memory:",
    "logging": false,
    "operatorsAliases": false,
    "pool": {
      "max": "5",
      "min": "0",
      "acquire": "30000",
      "idle": "10000"
    }
  },
  "development": {
    "username": "root",
    "password": "test",
    "database": "interopdb",
    "host": "localhost",
    "port": 3306,
    "dialect": "mysql",
    "logging": false,
    "operatorsAliases": false
  }
}
```

**Note: enter the correct MySQL username and password; save and close:**

Remember, MySQL username or password may be different from the one shown in the figure above. Use the correct credentials for your instance.

Restart IL: `sudo pm2 reload all --update-env`

### 3. Update global properties:

Log into KenyaEMR as admin

Navigate to the developer tab. Then to legacy admin UI.

Look for the maintenance part where you will see advanced settings.

Once in the advanced settings, search for the following and fill.

- `ilServer.address` : <http://localhostIP:9721/api/> (Replace "localhostIP" with the correct IP address of the machine hosting IL instance)

- *Appointment task last fetch date and time and set the date value to today's date. The correct format is: year/month/day/hour/min/sec*

```
DO NOT MODIFY. true/false whether or not the appointmentscheduling module has been started. this is used to make sure modules that were running prior to a restart are started again
appointmentTask.lastFetchDateAndTime 20210802115959
The last date and time that the last fetch was done for appointment task
```

- *Enrollment task last fetch date and time and set the date value to today's date. The correct format is: year/month/day/hour/min/sec*

```
enrolmentTask.lastFetchDateAndTime 20210802115959
The last date and time that the last fetch was done for enrollment task
```

- *ORU task last fetch date and time and set the date value to today's date. The correct format is: year/month/day/hour/min/sec*

```
oruTask.lastFetchDateAndTime 20200321092802
The last date and time that the last fetch was done for unsolicited results task
```

- *Pharmacy Order task last fetch date and time and set the date value to today's date. The correct format is: year/month/day/hour/min/sec*

```
pharmacyOrderTask.lastFetchDateAndTime 20190226120000
The last date and time that the last fetch was done for orders task
```

- *Viral Load task last fetch date and time and set the date value to today's date. The correct format is: year/month/day/hour/min/sec*

```
virallaodTask.lastFetchDateAndTime 20180621120000
The last date and time that the last fetch was done for viral load task
```

Also search for; **facility.mflcode** : **facility MFL code** if it is not there then Scroll to the bottom of the page and click on **add property**.

Two rectangular text boxes will appear.

On the text box that is on your left type in **facility.mflcode** and on the right enter the MFL code.


htmlformflowsheet.showMdrtbCatIVLink	false	Remove
adds the cat IV treatment card link to the form list in the mdrtb module. valid values are blank, true, false		
htmlformflowsheet.started	true	Remove
DO NOT MODIFY true/false whether or not the htmlformflowsheet module has been started. This is used to make sure modules that were running prior to a restart are started again		
htmlwidgets.mandatory	false	Remove
true/false whether or not the htmlwidgets module MUST start when openmrs starts. This is used to make sure that mission critical modules are always running if openmrs is running.		
htmlwidgets.started	true	Remove
DO NOT MODIFY true/false whether or not the htmlwidgets module has been started. This is used to make sure modules that were running prior to a restart are started again		
idgen.database_version	2.4.1	Remove
DO NOT MODIFY. Current database version number for the idgen module.		
idgen.mandatory	false	Remove
true/false whether or not the idgen module MUST start when openmrs starts. This is used to make sure that mission critical modules are always running if openmrs is running.		
idgen.started	true	Remove
DO NOT MODIFY true/false whether or not the idgen module has been started. This is used to make sure modules that were running prior to a restart are started again		
ilServer.address	https://il.kenyahmis.org:9721/api/3pm	Remove
This is where IL Outbox messages will be routed to		
kenyacore.mandatory	false	Remove
true/false whether or not the kenyacore module MUST start when openmrs starts. This is used to make sure that mission critical modules are always running if openmrs is running.		
kenyacore.started	true	Remove
DO NOT MODIFY true/false whether or not the kenyacore module has been started. This is used to make sure modules that were running prior to a restart are started again		
kenyadq.mandatory	false	Remove


Save and go back to the administration tab.

**NB:** Navigate to browser and type **localhost:5000** and log into the interoperability layer with the following credentials.

Username: **admin**

password: **admin**

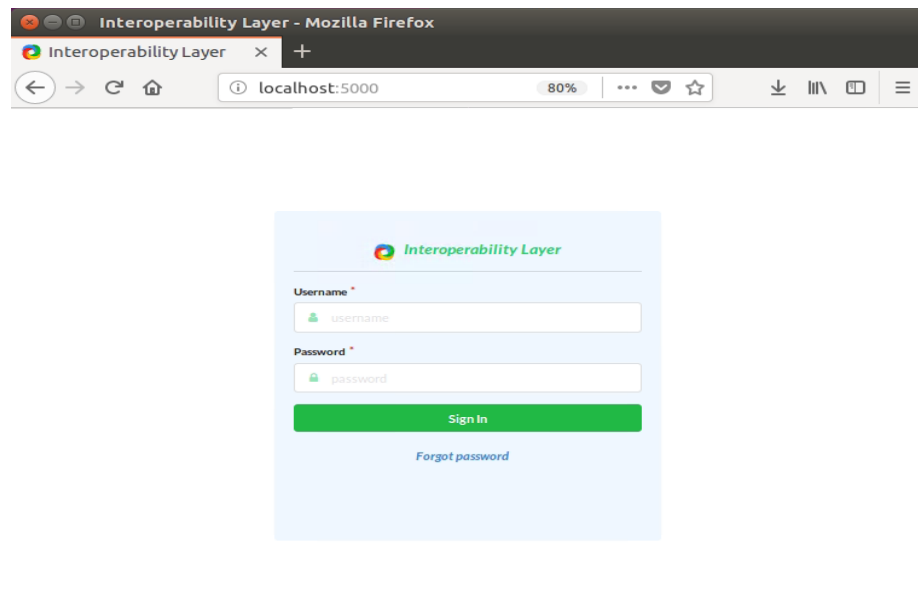

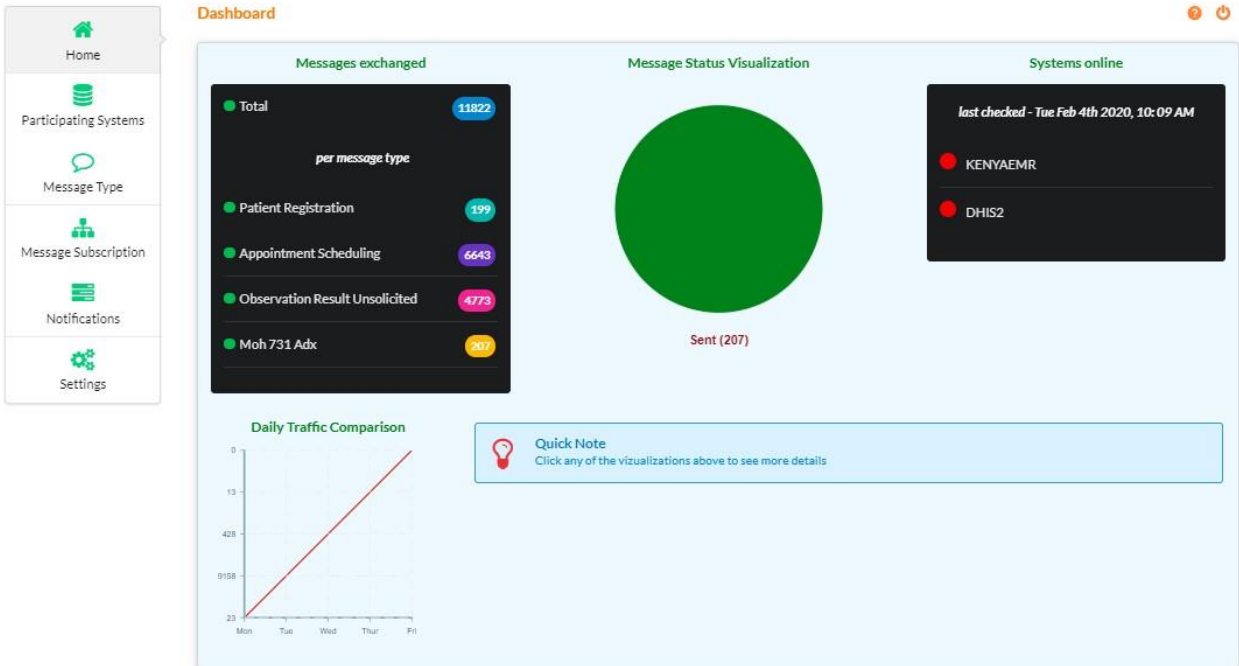

In case your web page does not display similar to above and appears somewhat distorted or squeezed to one side of the screen then you will need to update your Mozilla Firefox to the latest version using the following steps;

- Close all running instances of Mozilla Firefox browser
- Open terminal and run the following.
- `sudo add-apt-repository ppa:ubuntu-mozilla-security/ppa`
- `sudo apt-get update`
- `sudo apt-get install firefox`

**Note: You will need internet to update Mozilla**


### Troubleshooting IL

- Check the status of IL service: `sudo pm2 list:`
- Check last 100 lines of the IL logs: `sudo pm2 logs --lines 100`
- Restart IL service: `sudo pm2 reload all --update-env`

### SECTION 3: IL PARTICIPATING SYSTEMS SETUP:

The following procedures are to be performed right after successful installation of IL.

- On the main menu, click on **Participating Systems** link
- Update the address(es) of the participating systems present in the facility, which you'd like to include in the exchange, by clicking the **Update Address** link, and putting in the address

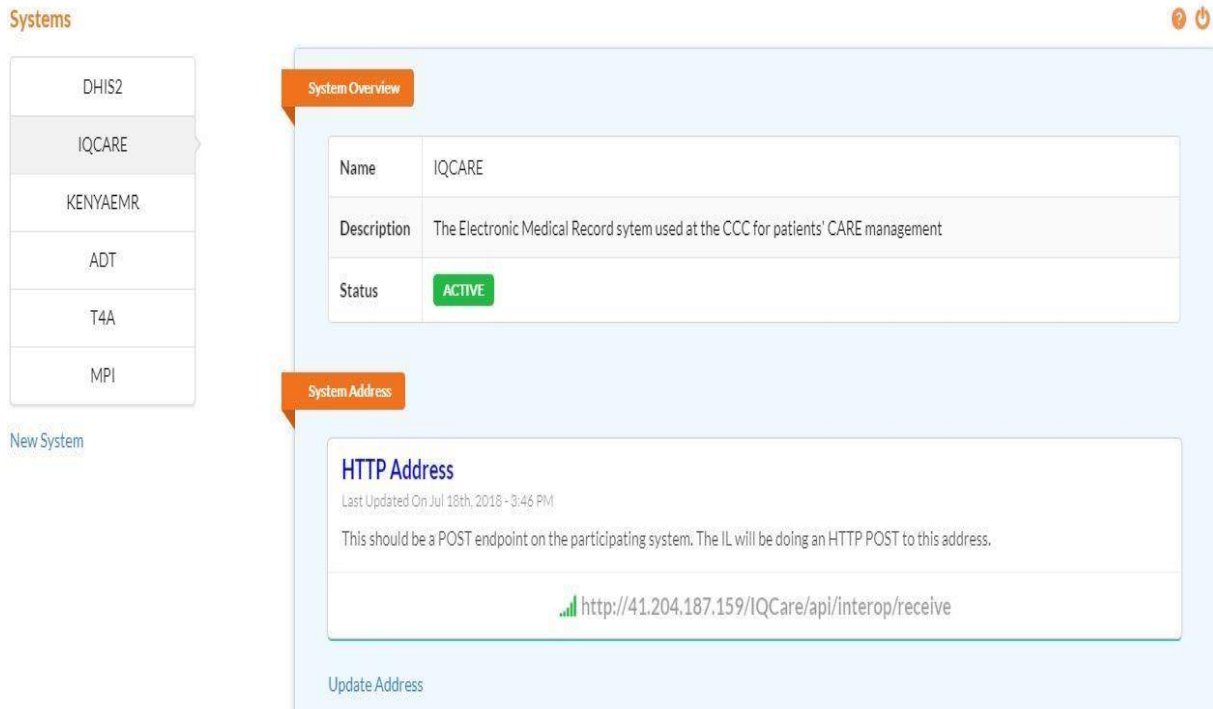

Please see below the default addresses for each system. Only update the address for the systems in this facility:

Participating System	Address	Notes
KenyaEMR	http://[localhost]:8080/openmrs/ws/rest/v1/inte rop/processh17i1	[localhost] = IP address of KenyaEMR Server
ADT	http://[localhost]:88/ADT/tools/api	[localhost]=IP address of the ADT Server
T4A	http://[localhost]:1440/h17_mes sage	[localhost]=IP address of the T4A server

The IL provides a settings page to use a reference for address locations of the IL APIs and Portal, DHIS 2 User credentials, IL Admin Password.

END